

Flowfresh SR

A very durable and slip resistant industrial flooring based on polyurethane resin with a layer of quartz sand.



Antimicrobial properties:

Contains Polygiene, an antimicrobial additive based on silver ion technology



Hygienic:

Meets hygienic requirements and is certified by HACCP International



Anti-slip surface:

High slip resistance even in wet working environment.



Wear resistance:

High abrasion and impact resistance

Technical Information¹

REACTION TO FIRE

B_n-s1 EN 13501-1

SLIP RESISTANCE²

Dry 90, wet 65 EN 13036-4

TEMPERATURE RESISTANCE

-25°C to 90°C (6 mm)
-40°C to 120°C (9 mm)

WATER PERMEABILITY

Karsten test - Nil (Impermeable)

WEAR RESISTANCE

RWA1 EN 13892-5

COMPRESSIVE STRENGTH

> 50 N/mm² EN 13892-2

FLEXURAL STRENGTH

20 N/mm² EN 13892-2

TENSILE STRENGTH

7 N/mm² BS 6319

IMPACT RESISTANCE

IR15 EN ISO 6272-1

BOND STRENGTH

2,8 MPa EN 13892-8

Complies with BS 8204-6/FeRFA type 8

SPEED OF CURE	10°C	20°C	30°C
Light Traffic	36 hrs	24 hrs	12 hrs
Full traffic	72 hrs	48 hrs	24 hrs
Full chemical cure	10 days	7 days	5 days

Standard colour chart



Ochre

Cream

Mustard

Red



Green

Grey

Dark Blue

Dark Grey

The applied colours may differ from the examples shown.
For a full colour chart and samples, contact your local Flowcrete office.

Model Specification

System:	Flowfresh SR
Finish:	Matt
Thickness:	From 4,0 to 9,0 mm
Colour:	According to the catalog
Producer:	Flowcrete Group Ltd
Supplier:	Flowcrete Polska Sp. z o.o.
Telephone:	+48 22 879 89 07

Installation Service

The installation should be carried out by a Flowcrete approved contractors with a documented quality assurance scheme. Obtain details of our approved contractors by contacting Flowcrete Polska or enquiring via our website at www.flowcrete.com.pl.

Products Included in this System

Primer³:	Flowfresh Primer
Topping:	Flowfresh MF/RT; Natural quartz sand 0,5–1,0 mm
Sealer:	Flowfresh Coating

³ If other resins are used contact Flowcrete Polska for further details.

Detailed application instructions are available upon request.

Microbial / Fungal Resistance

The Polygiene antimicrobial additive incorporated into Flowfresh MF provides control of most bacteria and fungi which come into contact with the floor. Antimicrobial Active substance: Silver biocide
Tested: ISO 22196/JIS Z2801.


Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent. Flowcrete Flooring Cleaning Instruction available upon request.

Substrate Requirements

Concrete or screed substrate should be class min. C20/25, a minimum bond strength of 1,5 MPa (pull-off test), surface even, clean, free from laitance, dust and other contamination. All damages in the substrate should be repaired prior to applying the flooring. The substrate should be dry up to 75% RH as per BS 8204 (5% moisture content per weight) and free from rising damp and ground water pressure. In case of higher humidity, one should use Hydraseal DPM as primer. Details to be found in the *Flowcrete Resin Flooring Substrate Requirements*.

System Design

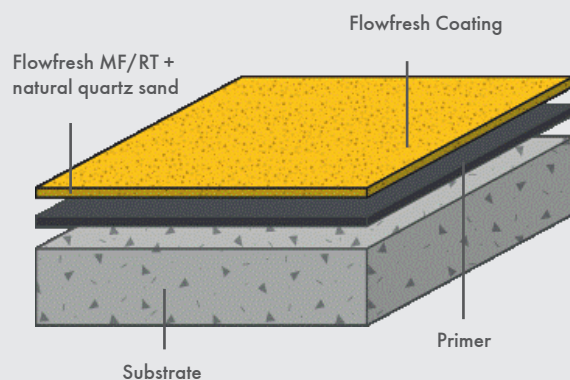

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless, impermeable surface with perfect adhesion to the substrate reduce the need for repairs and maintenance.

Complies with LEED EQ Credit 4.2. requirements: VOC content < 100 g/l.

Technical information, recommendations and instructions concerning the product use, storage and maintenance included in this System Data Sheet are based on Flowcrete Polska Sp. z o.o. (further related as „Flowcrete“) knowledge and experience, reflecting the best acknowledged way of using the material for a given moment. Taking into consideration other factors that are beyond the producer's control, including differences in quality of substrates, tools and other complementary materials, weather conditions, proper installation and also cleaning and maintenance, Flowcrete cannot take responsibility in case of failure to conform with information and instructions included in this System Data Sheet or, respectively, written recommendations from authorized Flowcrete representatives. One should always conform with up-to-date norms and building principles, and also safety, hygiene and health protection rules according to the information included in Material Safety Data Sheets and also on the products packaging. This System Data Sheet replaces all previous versions. In order to receive up-to-date System Data Sheets contact Flowcrete Polska

[25/01/18]

Flowcrete Central & Eastern Europe
ul. Marywilska 34 03-228 Warsaw Poland
Tel: +48 22 879 8907 Fax: +48 22 879 8918
Email: poland@flowcrete.com

www.flowcrete.com.pl